



# How to program the ES 433 MHZ Transmitter for the ES 433 MHZ Receiver

## Do-It-Yourself Operation Manual

What you will need:



D□




M□

00MDO□  
00DOD□

DODOD□ □

## How to program the ES 433 MHZ Transmitter for the ES 433 MHZ Receiver

2) Press and release the "Learn 1" button (shown below on the left). Notice how the learn light is lit up on the receiver (shown below on the right).

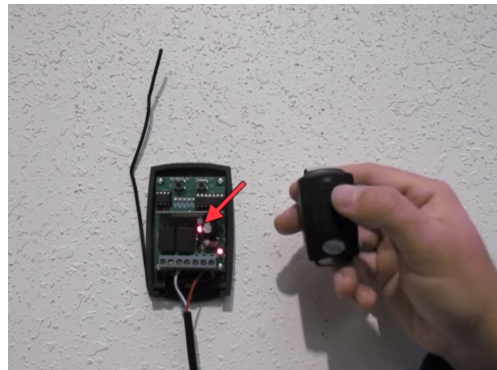

3) Press and hold the transmitter (also known as remote) button until the receiver lights up like the picture shown below to the left. Continue holding this button until you see the receiver "learn" light flashing on and off as shown below to the right.



4) This button is now programmed to your receiver. You should be able to hear an audible click when the remote button is pressed. You can program all 4 buttons on the transmitter to the receiver. You can program up to 1 button on 400 remotes, or you can program all 4 buttons on up to 100 remotes/transmitters.

5) To program another button on the transmitter to the receiver, press the "Learn 1" button and release it. The learn light will come on. Press and hold the second button on the remote until the learn light on the receiver flashes on and off. At this point, both buttons are programmed to the receiver. Repeat for the other buttons.

6) The receiver also has a "Learn 2" button. The "Learn 2" button is paired with "Channel 2", which is not used in the basic Estate Swing installation. For guidance on how to use "Channel 2", please contact Estate Swing.